

Porta John®

Toll-Free Phone: 800-521-6310 Fax: 586-731-0670

International Phone: 586-739-4611

Web Page: www.HandWashStation.com
E-Mail: info@toilets.com



Fresh Water Hand Wash with Social Distancing

Model FPHW 4545S

Sink Manufactured from 100% High Density Polyethylene
Stainless Steel Latches
Heavy Duty Foot Pumps
Shipped Fully Assembled



Model FPHW 4545S

Made From High Density Polyethylene


Water Faucet
Activated With Foot Pump

Note: Pre-Drilled Hole For Fresh Water Fill Marker



Hand Soap Reservoir

Waste Basket

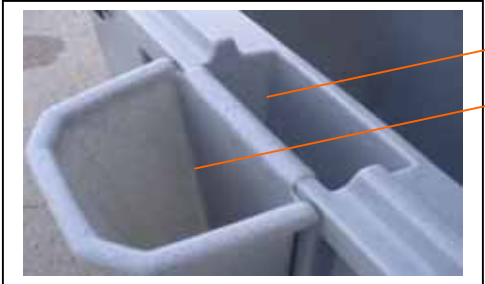

Bi-fold Towel Holder
Two Packages
Of Paper Towels

Hand Soap Pump

Hand Wash Faucet

45 Gallons of Fresh Water and 45 Gallons of Grey Water Capacity



Porta John®

Toll-Free Phone: 800-521-6310 Fax: 586-731-0670

International Phone: 586-739-4611

Web Page: www.toilets.com E-Mail: info@toilets.com

Model FPHW 4545S



The dimensions of the dual sink unit are:

48" x 24" x 48" (30 inch sink Level)

Weight is 104 pounds

Fresh Water Capacity: 45 Gallons (US)

Waste Water Reservoir: 45 Gallons (US)

Note: Pre-Drilled Hole For Water Fill Marker

Our two-person hand wash stations have a 90 gallon capacity, contain dual sinks, towel holders and soap dispensers and are equipped with a waste basket.

These sinks can be placed side to side for an unlimited number of dual hand wash stations.



Model FPHW 4545S

Porta John®

Toll-Free Phone: 800-521-6310 Fax: 586-731-0670

International Phone: 586-739-4611

Web Page: www.toilets.com E-Mail: info@toilets.com

DUAL HAND WASH STATION **Model FPHW4545S** USE & MAINTENANCE INSTRUCTIONS

Tools Needed: NONE

1. Prior to use, fill fresh water reservoir with 1 – 2 gallons of water. Gently rock Hand wash Station back and forth to flush out any scrap material.
2. Tip the unit up, lie on end and drain water through the water fill hole. You are now ready to fill the Hand Wash Station with fresh water.
3. Open top and place waste container over front lip of unit.
4. Insert any type of liquid soap into soap reservoir by lifting top and filling the reservoir.
5. Place 45 gallons of water in the sink through the water fill hole. DO NOT OVERFILL. The overflow mark and factory-drilled hole is located on the outside corner below the fill hole.
6. Insert paper towels into towel holder by lifting the towel holder lid. Insert towels and pull the first towel out to get it started. Single, double, C-fold, or bi-fold towels may be used.
7. General Maintenance for Hose & Foot Pump:
 - a. After each use, flush out the system with 1 oz. bleach to 3 gallons of water to prevent calcium or lime build-up. Pump the foot pump until you smell bleach and then store unit away. Before next use, flush out with fresh water.
 - b. If storing in freezing conditions, empty all water and add 1 gallon of RV antifreeze. Pump both foot pumps until antifreeze comes out the faucets. Flush system with fresh water before next use.

Fresh Water Hand Wash with Social Distancing